



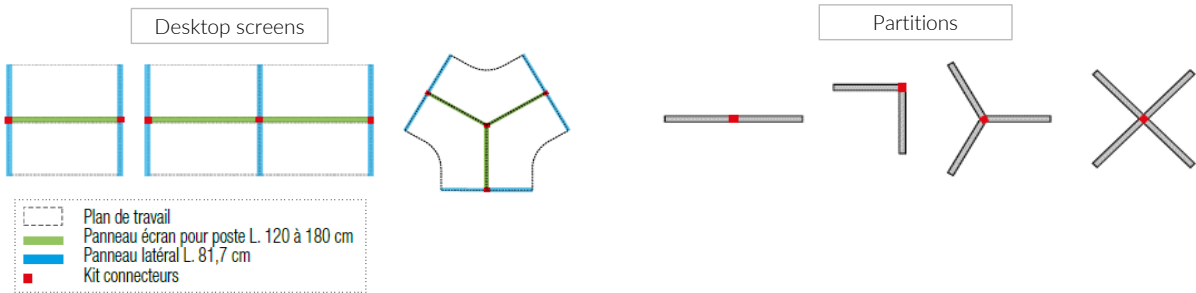


CHARACTERISTICS

DESKTOP SCREENS AND PARTITIONS



<p>DESIGN</p>	<p>Internal composition: Acoustic fabric version > 1 insulating MDF board 10 mm thick > 2 absorbent melamine foam strips, category M1, thickness 15 mm, bonded onto the MDF board > Covered in two strips of bonded fabric > Acoustic insulation and absorption: 85% of noise pollution is absorbed by LUCIEN screens (average rate with false ceiling and fitted carpet, subject to change depending on the environment.)</p> <p>Altuglas version >1 Altuglas panel held on all 4 sides by a PVC seal in the groove of the aluminium profile.</p> <p>Frame: > Structure in epoxy lacquered aluminium (choices of 3 finishes) composed of 2 vertical uprights and 2 horizontal crossbeams > Assembly of uprights and top crossbeam (both cross-section 42 x 45 mm) by jointing, internal linking piece in Zamac alloy, using 2 screws ø 3.5 mm at each extremity. A cap is placed on the top of the uprights > Assembly of uprights and lower crossbeam (section 42 x 40 mm) using 4 mm thick steel sheet and 4 screws ø 3.5 at each extremity</p>
<p>SPECIFIC CHARACTERISTICS FOR- DESKTOP SCREENS</p> <p>1 </p> <p>2 </p> <p>3 </p> <p>4 </p>	<p>Securing desktop screens to the desktop It is essential to add fixing clamps (sold separately) to hold the desktop screens in place on the desktop > Epoxy lacquered steel (choice of 3 colours) > Compatible with 25 and 30 mm thick desktops</p> <p>Fixing clamps to be ordered separately from screens, based on the configuration 1) Single clamps for frontal attachment on individual workstations 2) Twin clamps for frontal attachment on face-to-face individual workstations and shared structural frame workstations with 2 worktops D. 1650 3) Twin bridge clamps for shared structural frame workstations with 2 worktops (compatible with CONECT/4MOST D. 1650 mm and ARIAL/CONNECT/ ROBIN D. 1420 mm) 4) Twin clamps for bolt-through attachment to shared structural frame workstations with single worktop</p> <p>In the lateral version, 2 configurations are possible (attachment plates included under the screen): > In intermediate position, attachment by clamped plate between 2 worktops, starter/add-on > At the extremities, attachment by screwing directly into the edge of the screen</p> <p>The top crossbeam has a groove on both sides to take PUEBLO accessories (see options) and rail-mounted flatscreen monitor arms (see Flatscreen monitor arms). Weight supported by screens: 10 kg (the weight must be evenly distributed)</p>

<p>SPECIFIC CHARACTERISTICS - PARTITIONS</p>	<p>Partitions</p> <ul style="list-style-type: none"> > Mounted on 2 stabiliser feet > Possible to add a stabiliser foot to avoid tipping (see Partition options) <p>Mixed fabric / glass partition</p> <ul style="list-style-type: none"> > Surface area of 47 cm in 5 mm thick transparent safety glass, > Median crossbeam (H. 1050 mm on a partition H. 1600 mm, and H. 1450 mm on a partition H. 2000 mm) screwed to the lateral uprights and fitted with a groove to take PUEBLO accessories (see options). Useful load per partition: 8 kg
<p>ASSEMBLY</p>	<p>Connector kits</p> <ul style="list-style-type: none"> > Desktop screens and partitions can be linked together using a connector kit (sold as an option). > Connector kits consist of several parts in light grey ABS for use depending on the configuration: allows the linking of 2, 3 or 4 screens in line or in multi-directional layouts.  <p>Desktop screens</p> <p>Partitions</p> <p>Plan de travail Panneau écran pour poste L. 120 à 180 cm Panneau latéral L. 81,7 cm Kit connecteurs</p>

DESKTOP SCREEN OPTIONS

<p>ACCESSORIES</p>	<p>The top crossbeam has a groove on both sides to take PUEBLO accessories and rail-mounted flatscreen monitor arms (see Flatscreen monitor arms).</p> <p>PUEBLO Accessories</p> <ul style="list-style-type: none"> > Sheet steel 1 mm thick > Finish: lacquered epoxy (see metals shade card)
--------------------	--

PARTITION OPTIONS

<p>STATIC AND MOBILE FOOT</p> 	<p>Stabiliser foot to avoid tipping of partition:</p> <ul style="list-style-type: none"> > Lacquered steel (choice of 3 finishes) with 2 threaded holes \varnothing 8 mm at each extremity in which to attach castors (sold as an option) and a central hole \varnothing 15 mm to take the height adjustable foot > Stabiliser foot dimensions 449 x 78.5 x 6 mm <p>Fixed stabiliser foot to be ordered based on configuration:</p> <ul style="list-style-type: none"> > In line: 2 feet are required for a starter partition, then 1 foot between every 2 partitions > For 2, 3 ("T" shaped layout) or 4 angled partitions (in cruciform layout): no stabiliser feet required. <p>Possible to add castors sold as an option (colour: White or Aluminium grey) \varnothing 65 mm with brakes</p> <ul style="list-style-type: none"> > Sold in sets of 4 castors (for 2 stabiliser feet) > Mobile feet should always be ordered in sets of 2 to equip one partition
<p>CABLE TROUGH</p> 	<p>Horizontal cable trough:</p> <ul style="list-style-type: none"> > Lacquered steel (choice of 3 finishes) > L. 800 or L. 1200 mm depending on partition width > To insert into the groove on the bottom crossbeam



ACOUSTIC DESKTOP SCREENS	
OVERALL SCREEN DIMENSIONS (in mm)	
Height	400
Width	1200 / 1400 / 1600 / 1800
Thickness	42
USEFUL DIMENSIONS OF SCREEN (in mm) / Clamps included	
Height	400
Width	1200 / 1400 / 1600 / 1800
Thickness	42
WEIGHT (in kg)	
Weight supported (kg)	10

* Dimensions measured between the worktop and the top of the screen



DIMENSIONS

PUEBLO ACCESSORIES	Letter tray - starter unit	Letter tray - add-on unit	Pencil cup	3-slot sorting tray
OVERALL DIMENSIONS (in mm)				
Height	50	52	100	235
Width	335	335	84	385
Depth	220	220	38	220
WEIGHT (in kg)				
Weight supported (kg)	1,5	1,5	1	4

PARTITIONS

ACOUSTIC PARTITIONS	Fabric partitions	Partitions 2/3 fabric + 1/3 glass		
OVERALL PARTITION DIMENSIONS (in mm)				
Height	1600	2000	1600	2000
Width	800 / 1200	800 / 1200	800 / 1200	800 / 1200
Thickness	42	42	42	42

ACOUSTIC PARTITIONS	Fabric partitions	Part-fabric and part-glazed partitions		
USEFUL PARTITION DIMENSIONS (in mm) - Feet included				
Height (fixed feet)	1618	2018	1618	2018
Height (feet on castors)	1692	2092	1692	2092
Width	800 / 1200	800 / 1200	800 / 1200	800 / 1200
Thickness	42	42	42	42

